


Revision and Errata List

AISC Specification for Structural Steel Buildings, 2022 (1st Printing)

Date: December 21, 2023

The following list represents corrections to the First Printing of the AISC *Specifications for Structural Steel Buildings*, dated August 1, 2022.

Page(s)	Item
16.1-60	In Equation F5-1, replace M_p with M_n .
16.1-64	Replace equation numbers (F7-10) through (F7-13) with (F7-8) through (F7-11).
16.1-167	Revise the resistance factor, ϕ , for the limit state of shear yielding (punching) for branches under in-plane bending (given by Equation K4-2) from 0.90 to 0.95 (LRFD).
16.1-185	In Sections N4.1(b) and N4.2(b), revise “AWS D1.1/D1.1M, clause 8.1.4.2(4)” to “AWS D1.1/D1.1M, clause 8.1.4.2(5)”.
16.1-241	In Section 4.2.4d(c), revise the second sentence after Equation A-4-11 as follows: “ $P_e(T)$ is calculated at elevated temperature using Equation I2-5 <u>I2-4</u> .”
16.1-242	In Section 4.2.4d(d), revise the second sentence after Equation A-4-12 as follows: “ $P_e(T)$ is calculated at elevated temperature using Equation I2-5 <u>I2-4</u> .”
16.1-281	In Section 7.3.1(b), revise the definition for the symbol L as follows: “ $L =$ height of story laterally unbraced length of member , in. (mm)”
16.1-447	Replace Figure C-I3.8(c) with the following (F_{cr} revised to F_n).

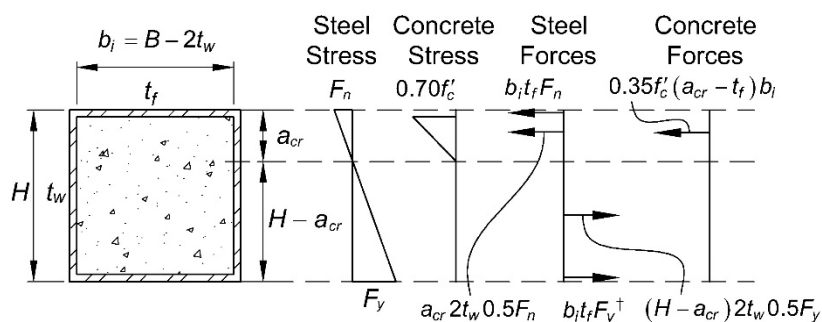


$$\text{Neutral axis location for force equilibrium: } a_{cr} = \frac{F_y H t_w + (0.35f'_c + F_y - F_n) b_i t_f}{t_w (F_n + F_y) + 0.35f'_c b_i}$$

[†]Neglecting stress variation over flange thickness

16.1-477	Revise the caption for Figure C-J1.2 under Alternates 1 and 2 as follows: “Rolled shapes and are built-up shapes assembled prior to cutting the weld access hole.”
----------	---

16.1-615

Replace Figure C-A-4.6 with the following (the coefficient 0.45 revised to 0.54).

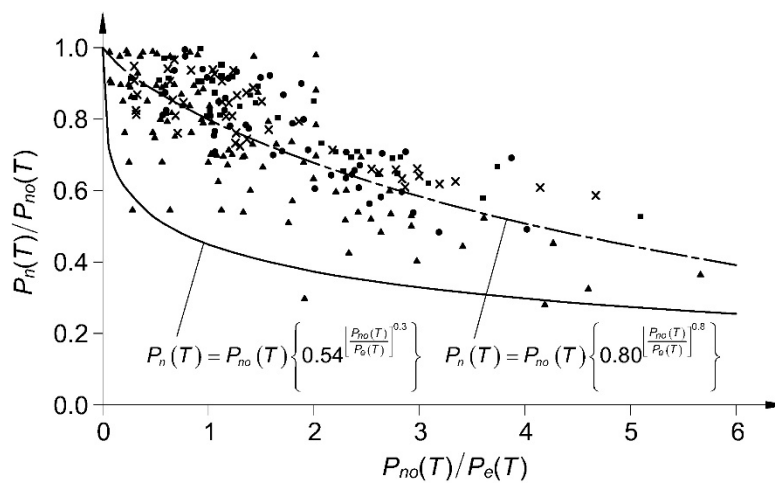

- ▲ Series 1: Aspect ratio
- Series 2: Section slenderness
- × Series 3: Steel strength
- Series 4: Concrete strength

$$P_{no}(T) = A_s F_y(T) + 0.85 \sum_{i=\text{conc_elements}} f'_c(T_i) A_{ci}$$

$$P_e(T) = \frac{\pi^2 (EI)_{\text{eff}}}{L_c^2}$$

$$(EI)_{\text{eff}} = E_s(T) I_s + C_3 \sum_{i=\text{conc_elements}} E_c(T_i) I_{ci}$$

$$C_3 = 0.45 + 3 \left(\frac{A_s}{A_g} \right) \leq 0.9$$