


SSBC Inventory Photo Guide (2023)

Inventory Item Name / Item # /
Quantity per Station

Photo

Notes

Loading Angle (L4x3x1/2,
27" long, 25 lb each,
painted gray)

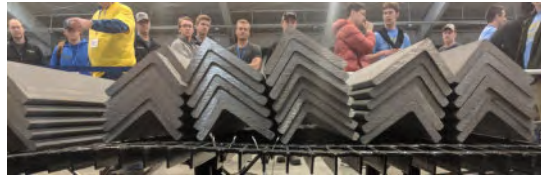

(3) Per Lateral Loading Station
(100) Per Vertical Station

Jack Stand



(8) Per Vertical Loading Station

2023 host will need to provide additional 4x4 wood supports to increase the maximum available height.


Refer to [Attachment A](#)

Steel Grating - No Tabs






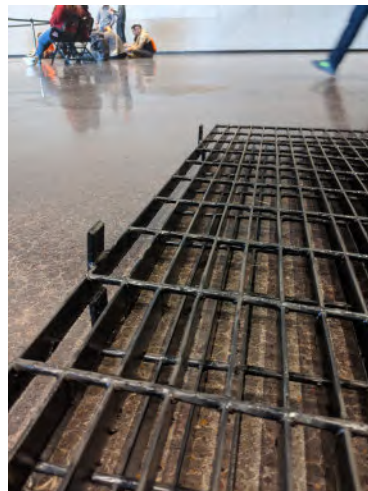


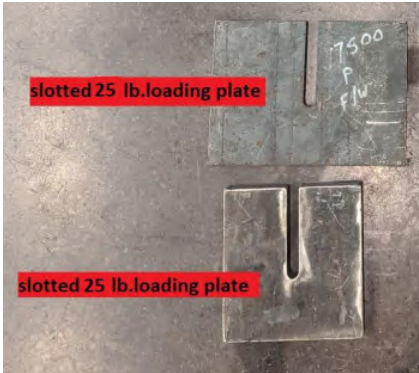

(1) Per Lateral Loading Station


Steel Grating - Tabs

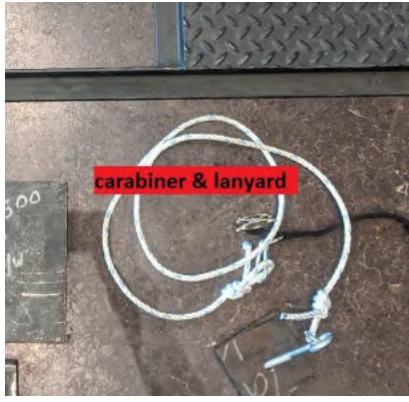

(2) Per Vertical Loading Station

Inventory Item Name / Item # / Quantity per Station	Photo	Notes
<p>Steel Bearing Plate (24" x 24" x ¼" thick)</p> <p>(4) Per Vertical Loading Station</p>		
<p>Lateral Load Stand</p> <p>(1) Per Lateral Loading Station</p>		
<p>Lanyard (Lateral Load Stand Accessory)</p> <p>(1) Per Lateral Loading Station</p>		
<p>Carabiner (Lateral Load Stand Accessory)</p> <p>(1) Per Lateral Loading Station</p>		

Inventory Item Name / Item # / Quantity per Station	Photo	Notes
<p>Dog Collar (Lateral Load Stand Accessory)</p> <p><i>(1) Per Lateral Loading Station</i></p>		
<p>Eye Bolt with Square Plate (Lateral Load Stand Accessory)</p> <p><i>(1) Per Lateral Loading Station</i></p>		
<p>Slotted 25 lb. Loading Plate</p> <p><i>(2) Per Lateral Loading Station</i></p>		<p>The (2) plates per station should be different sizes.</p>
<p>Wood Box - Member Check</p> <p><i>(1) Per Construction Station</i></p>		<p>This item must be stored in a dry and temperature controlled area</p>

Inventory Item Name / Item # / Quantity per Station	Photo	Notes
<p>Level (4')</p> <p>(1) Per Construction Station</p>		
<p>Vertical Deflection Measurement Device</p> <p>(2) Per Vertical Loading Station (1) Extra/Other</p>		
<p>Scale</p> <p>(4) Per Weighing Station (1) Extra / Other</p>		

Inventory Item Name / Item # /
Quantity per Station

Photo

Notes

Clipboard

- (5) Per Construction Station*
- (1) Per Lateral Loading Station*
- (1) Per Vertical Loading Station*
- (1) Per Weighing Station*



Tape Measure (25')

- (2) Per Construction Station*
- (1) Per Lateral Loading Station*
- (1) Per Vertical Loading Station*



Flashlight

- (1) Per Construction Station*



Stopwatch

- (2) Per Construction Station*



Inventory Item Name / Item # /
Quantity per Station

Photo

Notes

Laser Plumb-Bob

(1) Per Lateral Loading Station
(2) Per Vertical Loading Station



Steel Bars - (1) 1/8" x1" x3" and (1) 1/4" x1" x3"

(1) Per Construction Station



1" Radius Sway Target


(4) Per Lateral Loading Station
(4) Per Vertical Loading Station



Inventory Item Name / Item # / Quantity per Station	Photo	Notes
--	-------	-------

3/4" Radius Sway Target

(4) Per Lateral Loading Station
(4) Per Vertical Loading Station

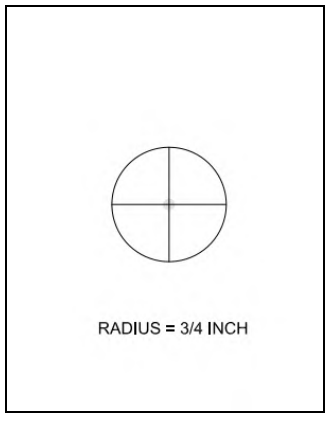

Magnet




(1) Per Construction Station










C-Clamp

(2) Per Vertical Loading Station



Inventory Item Name / Item # / Quantity per Station	Photo	Notes
<p>Instruction Guide for Vertical Deflection Device</p> <p>(1) Guide</p>	 <p>Vertical Deflection Measurement Device Instructions</p> <p>Preparation for Competition</p> <ol style="list-style-type: none"> The scoring spreadsheet should round deflection values to 40.00 inch. Check that the screws on the jaws are tight. Replace the battery with a new 357 button cell. The installed battery runs down during storage, and if it fails during operation, the deflection measurement is lost. The battery is under a sliding cover located just below the display. Be careful not to lose or damage the cover. Have extra 357 button cells available. Assure smooth operation. With the gage on a firm surface, the top jaw should slide up without the base lifting and should slide down with only gravitational force. Values should display when the upper jaw is moved. If the action is not smooth, pull the upper jaw to full extension and clean the groove in the sliding part and the depth probe protruding from the bottom of the caliper. Liquid cleaner and liquid lubricant are not recommended. <p>Operation</p> <ol style="list-style-type: none"> Set the display unit to decimal inches. Place the gage under the bridge. The bar weights attached to the chain and upper jaw should be vertical. Place the steel protective sleeve over the gage with the display showing. Press the 'zero' button. Pull the chain to open the caliper so that it can measure the maximum deflection allowed by competition rules plus a minimum of 0.5 inches. Use the provided hook to connect the chain to the decking at the location specified by competition rules. Move the gage and sleeve so that the chain is vertical. It should not have kinks. Initial values should be recorded rather than using the 'zero' button, which is very sensitive. If there is no deflection for several minutes, the display will sleep. However, the last value displayed is retained and the display will wake when deflection resumes. NOTE: The display may be awakened by lightly tapping the chain. If the upper jaw does not slide smoothly (see item 5 above in "Preparation..."), push it down before reading each measurement, using no more force than necessary. <p>www.aisc.org/ssbc Deflection Gage Instructions (Revised 12.26.19) 3-16</p>	<p>-If this item is damaged or not found in inventory, the Host must provide a replacement</p> <p>-AISC shipped a laminated instruction guide with the vertical deflection devices. If you can't find this item, it can be downloaded from the equipment guide on the Host Resources page. We ask that you print it and have a hard copy of the guide with the devices at all times.</p>
<p>Plywood Template - Passageway</p> <p>(1) Per Construction Station</p>		<p>-If this item is damaged or not found in inventory, the Host must provide a replacement</p> <p>-This item must be stored in a dry and temperature controlled area</p>
<p>Plywood Template - Ground Clearance (1/2" x 4" x 7 1/2")</p> <p>(1) Per Construction Station</p>		<p>-If this item is damaged or not found in inventory, the Host must provide a replacement</p> <p>-This item must be stored in a dry and temperature controlled area</p>

Inventory Item Name / Item # / Quantity per Station	Photo	Notes
<p>Wood Piece (4x4 x 3'-0") to increase maximum height of jack stands</p> <p>(8) Per Construction Station</p>		<p>2023 hosts will need to provide.</p> <p>Refer to Attachment A.</p>
<p>Plywood piece to protect tops of scales (1" x 11" x 11")</p> <p>(4) Per Weighing Station</p>		<p>-If this item is damaged or not found in inventory, the Host must provide a replacement</p>
<p>Wood Piece (2x4 x 3'-6")</p> <p>(1) Per Vertical Loading Station</p>		<p>-If this item is damaged or not found in inventory, the Host must provide a replacement</p>
<p>Wood Block (2x4 x 6")</p> <p>(2) Per Construction Station (1) Per Vertical Loading Station</p>		<p>-If this item is damaged or not found in inventory, the Host must provide a replacement</p> <p>-This item must be stored in a dry and temperature controlled area</p>

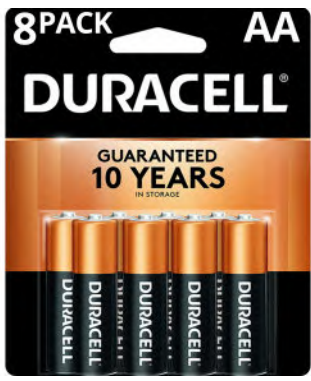Inventory Item Name / Item # / Quantity per Station	Photo	Notes
<p>String Line (25')</p> <p>(1) Per Construction Station</p>		<p>-This is used along with two Wood Blocks (2" x 4" x 6") You will often find it tied to the blocks.</p> <p>-If this item is damaged or not found in inventory, the Host must provide a replacement</p>
<p>Masking Tape Roll</p> <p>(1) Per Construction Station (1) Per Lateral Loading Station (1) Per Vertical Loading Station</p>		
<p>Batteries</p> <ul style="list-style-type: none"> - Test all battery operated devices prior to competition - Batteries should be removed from item when not in use - If the batteries are dead or not found in inventory, the host will need to provide a replacement. 		
<p>Flashlight Battery (type: AA 2 per flashlight)</p> <p>(2) Per Construction Station</p>		

Inventory Item Name / Item # / Quantity per Station	Photo	Notes
<p>Stopwatch Battery (type: LR44 1 per)</p> <p>(2) Per Construction Station</p>		
<p>Scale Battery (type: 9V 1 per)</p> <p>(4) Per Weighing Station</p>		<p>-Scale comes with a plug-in option, but can also run on batteries</p>
<p>Caliper Battery for Vertical Deflection Device (type: 357)</p> <p>(2) Per Vertical Loading Station</p>		
<p>Laser Plumb Bob Battery (type: AAA 4 per)</p> <p>(4) Per Lateral Loading Station (8) Per Vertical Loading Station</p>		

Attachment A
Wood cribbing for jack stands

To increase the maximum available height of the jack stands, provide 4x4 wood cribbing as shown.

